


MB102 Netzteil Adapter Datenblatt

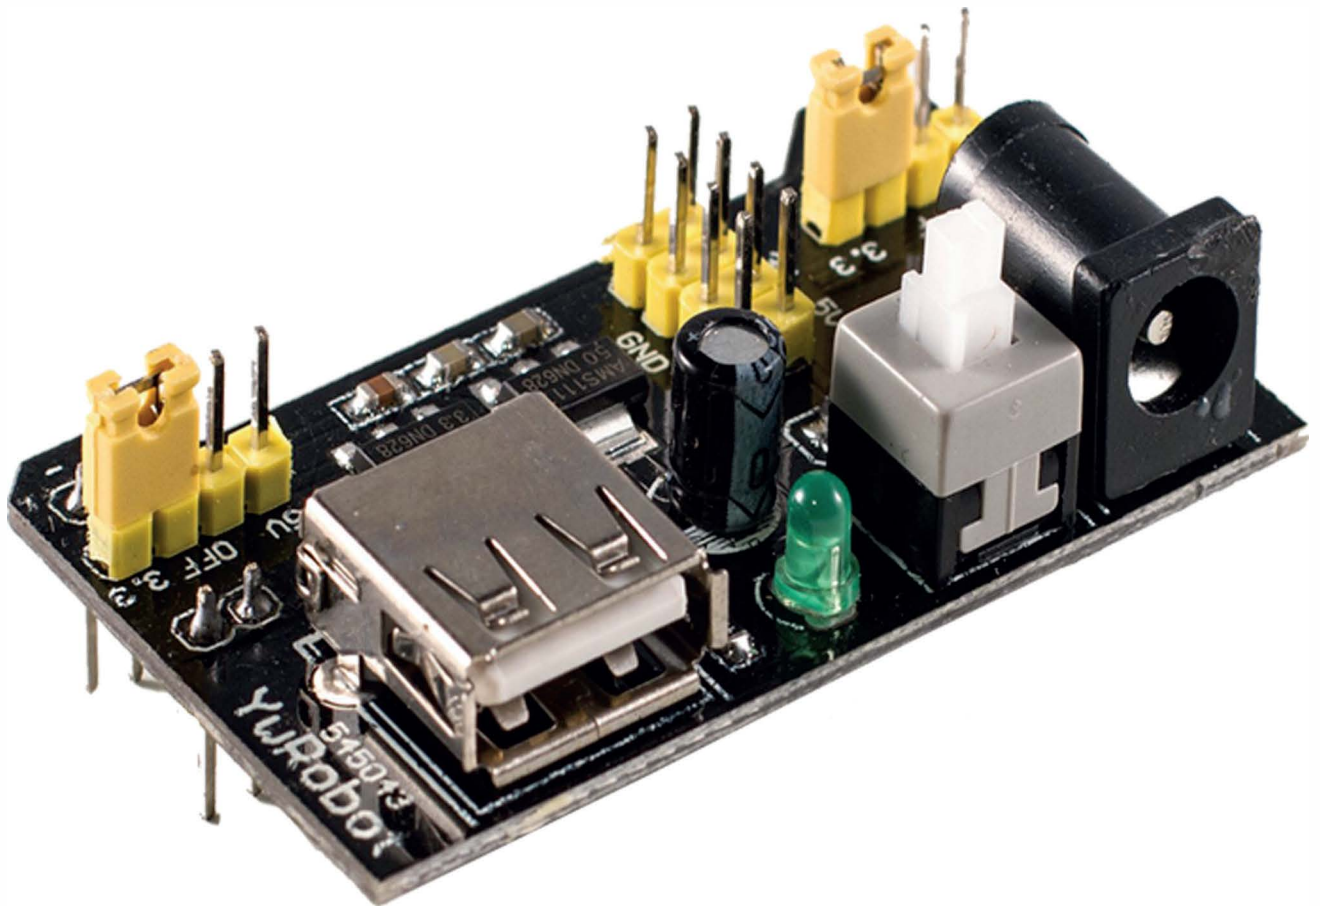

Contents:

- 1. Product Specifications**
- 2. Setting up output voltage**
- 3. Important note**

1. Product Specifications


- Locking On/Off Switch
- LED Power Indicator
- Input voltage: 6.5-12v (DC) via 5.5mm x 2.1mm plug
- Output voltage: 3.3V/5v
- Maximum output current: 300 mA
- Independent control rail output. 0v, 3.3v, 5v to breadboard
- Output header pins for convenient external use
- Size: 2.1 in x 1.4 in
- USB device connector onboard for power output to external device

2. Setting up output voltage



The left and right voltage output can be configured independently. To select the output voltage, move jumper to the corresponding pins. Note: power indicator LED and the breadboard power rails will not power on if both jumpers are in the "OFF" position.

3. Important note

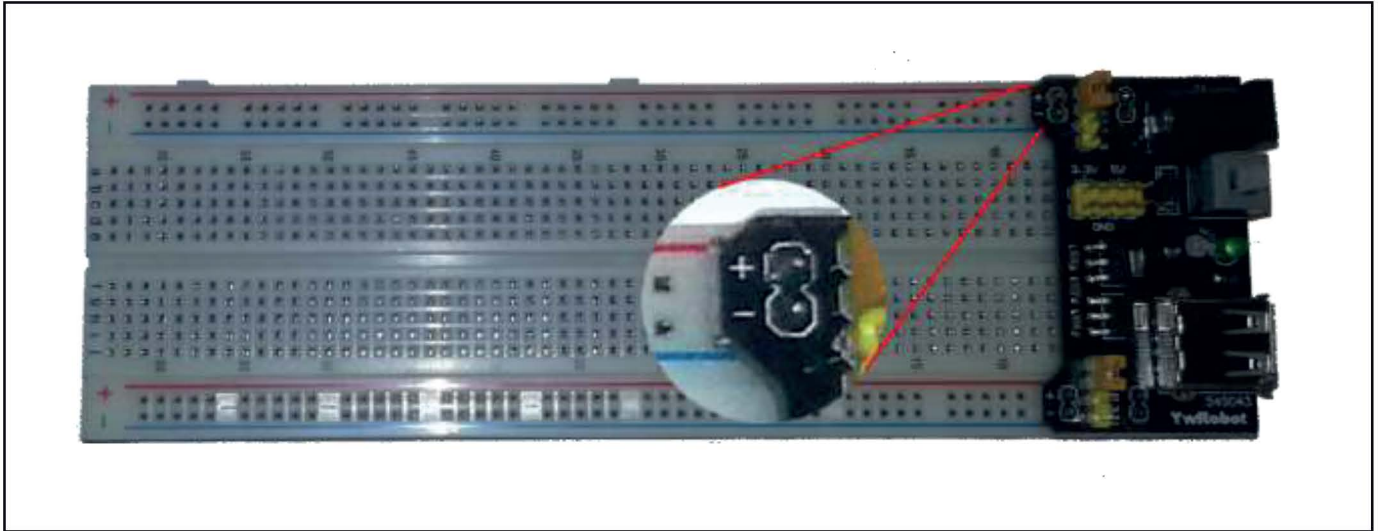

Make sure that you align the module correctly on the breadboard. The negative pin(-) on module lines up with the blue line(-) on breadboard and that the positive pin(+) lines up with the red line(+). Failure to do so could result in you accidentally reversing the power to your project.

USB connector is for powering external devices (output only). Do not attempt to use it to power the MB102.