
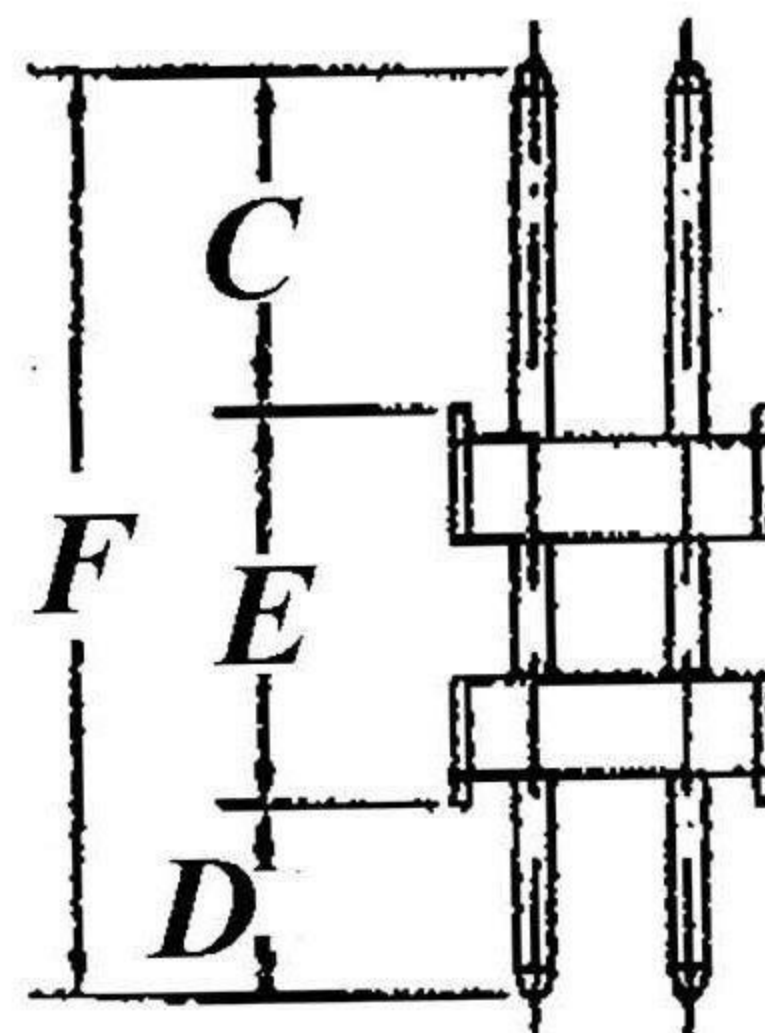


**MATERIAL**  
 HOUSING : THERMOPLASTIC UL94V-0  
 CONTACT : COPPER ALLOYS

**SPECIFICATION**  
 CURRENT: 3A  
 OPERATING TEMPERATURE: -55°C TO +105°C  
 CONTACT RESISTANCE : 20 MILLIOHMS MAX  
 INSULATION RESISTANCE : 1000 MEGAOHMS MIN  
 WITHSTANDING VOLTAGE: AC 1000V RMS

**RECOMMENDED P.C.B LAYOUT**

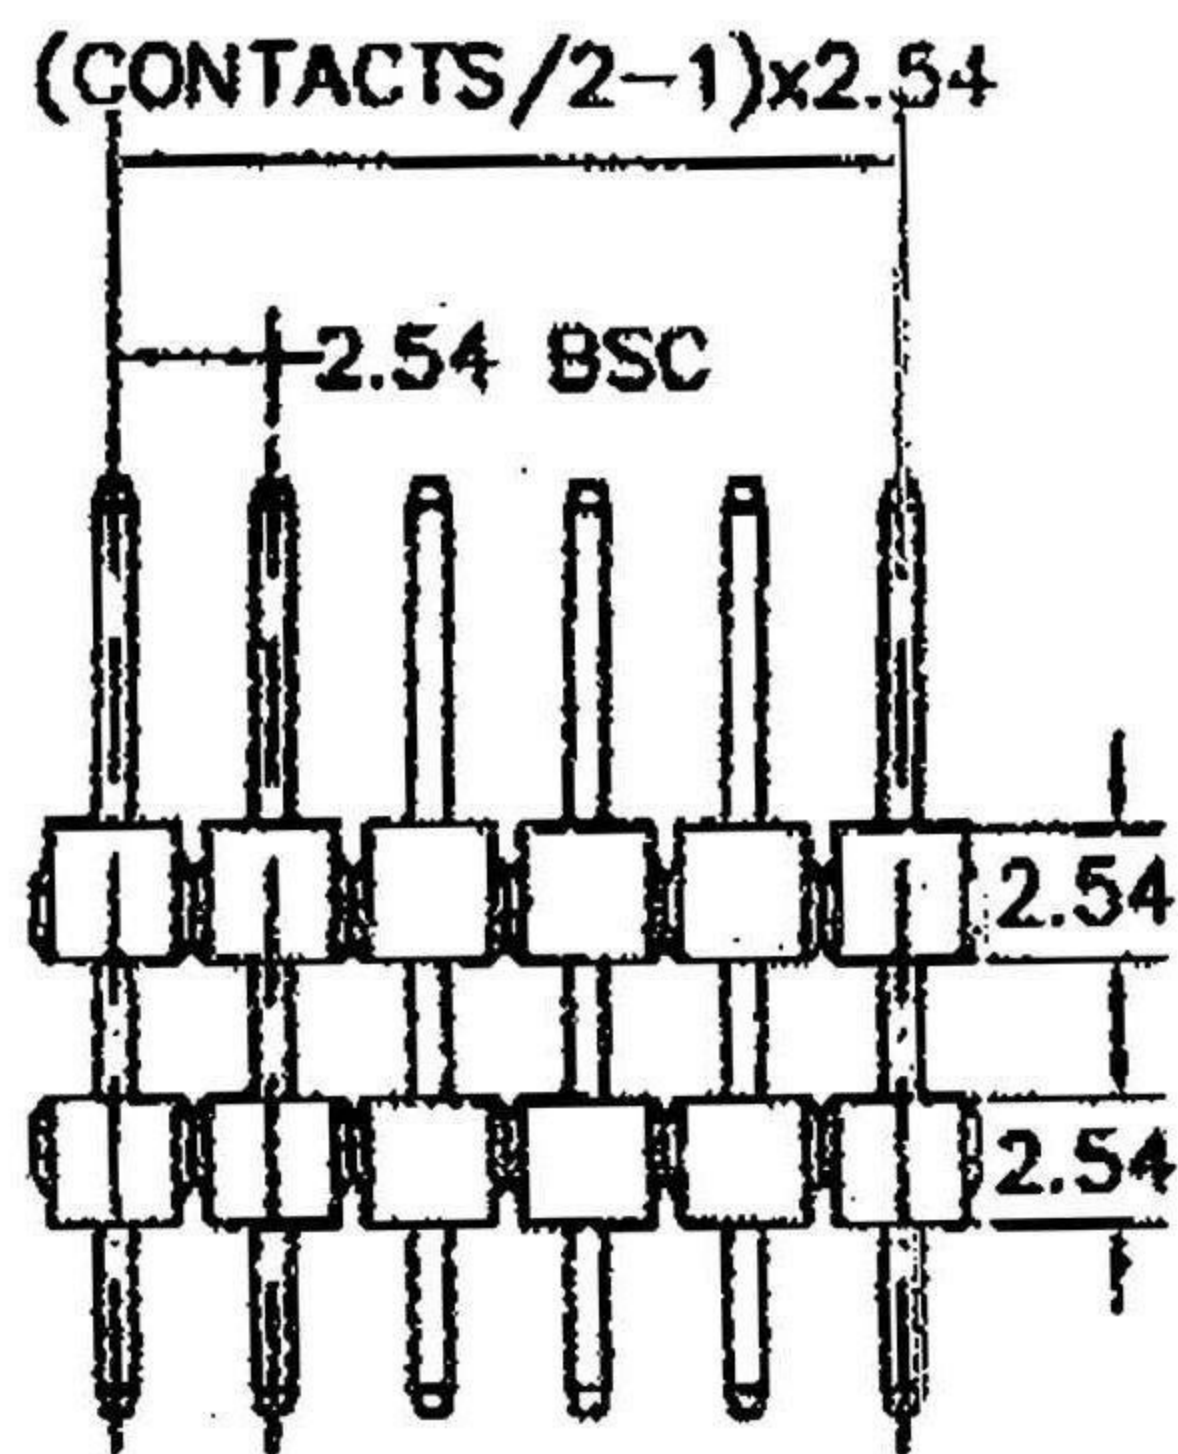

C:5mm D:5mm E:19mm F:29mm

CONTACTS	2X21
2X2	2X22
2X3	2X23
2X4	2X24
2X5	2X25
2X6	2X26
2X7	2X27
2X8	2X28
2X9	2X29
2X10	2X30
2X11	2X31
2X12	2X32
2X13	2X33
2X14	2X34
2X15	2X35
2X16	2X36
2X17	2X37
2X18	2X38
2X19	2X39
2X20	2X40

RoHS  
Compliant

**HSM 玄茂科技股份有限公司**  
**HSUAN MAO TECHNOLOGY CO., LTD.**

APPD. 核准 HELEN  
 DWG. 製圖 ABBY  
 DATE 制表日 2011/05/11

TOLERANCE 容許公差  
 SCALE 比例 參考  
 UNIT 單位 MM  
 PAGE 張數 1 OF 1  
 SIZE 紙張尺寸 A4  
 REV. 版次 A

PART NAME 品名  
 2.54mm PIN HEADER DUAL ROW DUAL INSULATOR  
 2X??P 180° GOLD FLASH ROHS LOW-LEAD  
 (C=5mm D=5mm E=19mm F=29mm)  
 PART NO. 料號 C2200-XXFSGTD0R