



Bild / Figure	Nr. / No.	Länge / Length (m)
	96302	0.50
	96313	1.00
	96324	2.00
	96335	3.00
	96346	5.00
	96357	7.00
	96368	10.00
	96379	15.00
	96390	20.00
	96394	0.50
	96315	1.00
	96326	2.00
	96337	3.00
	96348	5.00
	96359	7.00
	96370	10.00
	96381	15.00
	96392	20.00
	96305	0.50
	96316	1.00
	96327	2.00
	96338	3.00
	96349	5.00
	96360	7.00
	96371	10.00
	96382	15.00
	96393	20.00
	96299	0.50
	96310	1.00
	96321	2.00
	96332	3.00
	96343	5.00
	96354	7.00
	96365	10.00
	96376	15.00
	96387	20.00
	96301	0.50
	96312	1.00
	96323	2.00
	96334	3.00
	96345	5.00
	96356	7.00
	96367	10.00
	96378	15.00
	96389	20.00
	96300	0.50
	96311	1.00
	96322	2.00
	96333	3.00
	96344	5.00
	96355	7.00
	96366	10.00
	96377	15.00
	96388	20.00

Bild / Figure	Nr. / No.	Länge / Length (m)
	96303	0.50
	96314	1.00
	96325	2.00
	96336	3.00
	96347	5.00
	96358	7.00
	96369	10.00
	96380	15.00
	96391	20.00
	96298	0.50
	96309	1.00
	96320	2.00
	96331	3.00
	96342	5.00
	96353	7.00
	96364	10.00
	96375	15.00
	96386	20.00
	96297	0.50
	96308	1.00
	96319	2.00
	96330	3.00
	96341	5.00
	96352	7.00
	96363	10.00
	96374	15.00
	96385	20.00
	96296	0.50
	96307	1.00
	96318	2.00
	96329	3.00
	96340	5.00
	96351	7.00
	96362	10.00
	96373	15.00
	96384	20.00
	96295	0.50
	96306	1.00
	96317	2.00
	96328	3.00
	96339	5.00
	96350	7.00
	96361	10.00
	96372	15.00
	96383	20.00

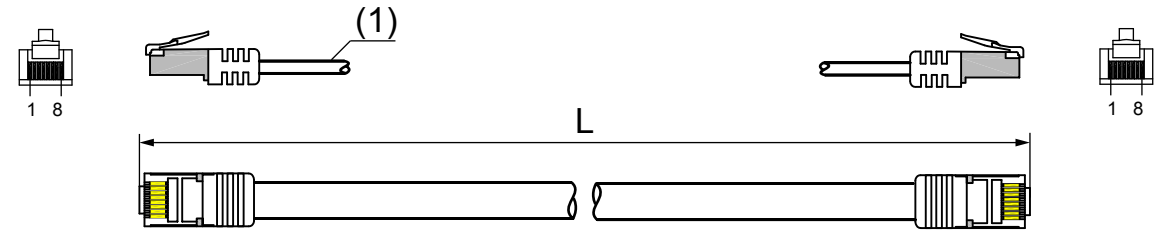

PIN Belegung / PIN wiring



CAT 6a Netzwerkkabel; Flachkabel

- Anschlüsse 2x RJ45-Stecker
- Kontakte 8P8C (3µ vergoldet)
- Standard CAT 6a (500 MHz)
- Impedanz 100 Ω
- Schirmung U/UTP (ungeschirmt)
- Innenleiter 4 x 2 x AWG 30/7 OFC
- Isolierung PVC
- (1) Außendurchmesser 6 mm x 1.5 mm
- RoHS-konform

CAT 6a Network cable; flat cable

- Connectors 2x RJ45 plug
- Contacts 8P8C (3µ gold-plated)
- Standard CAT 6a (500 MHz)
- Impedance 100 Ω
- Shielding U/UTP (unshielded)
- Inner conductor 4 x 2 x AWG 30/7 OFC
- Insulation PVC
- (1) Outer diameter 6 mm x 1.5 mm
- RoHS compliant

Änderungen		Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.: 12.11.2014	tf	CAT FLAT 6a U/UTP	
		gepr.: 12.11.2014	tf		
		Norm:		Zeichnungs-Nr.:	von
Änderungen vorbehalten / Subject to change					

