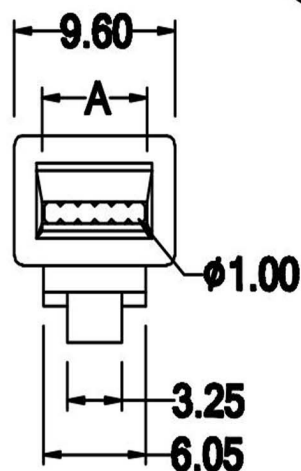





MATERIAL & FINISH

Body: PC. UL94V-2, clean

Contact: copper alloy, underplated 100uin Nickel,
and hard gold plated on contact region,
gold flash plated on remainder of terminal.

SPECIFICATION

Voltage Rating: 125 volts AC, at 1.5 amps.
Dielectric Withstanging Voltage: 1000 volts AC.
Insulation Resistance: 500 megaohms min.
Contact Resistance: 30 milliohms max.
Durability: 750 cycles.
Temp. Rating: -40°C to +85°C

	A
6P2C	5.20
6P4C	5.20
6P6C	7.15

UNIT: m / m
TOL.: +/- 0.10

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.
核准
DWG.
製圖
DATE 制表日
2024/5/8

SCALE
比例
參考
UNIT
單位
M M
PAGE
張數
1 OF 1

TOLERANCE
容許公差
.0
±
.00
±
ANG.
±
SIZE.
紙張尺寸
A 4
REV.
版次
F

PART NAME 品名
MODULAR PLUG 6PXC ROHS
PART NO.
料號