

圖號. DRAWING. NO :

品名 NAME : NYLON INSULATED CORD-END TERMINALS



版次 EDITION

NO:	記述 DESCRIPTION	日期 DATE	核可 CHECKED

WIRE RANGE mm ²	產品編號 ITEM NO.	MOQ REQUIRED	F	L	C	W	t	COLOR 顏色					
								FRENCH	GERMAN	DIN			
26AWG 0.14mm ²	TUL-RI-00106		6.00 ±0.40	10.50 ±1.50	0.80 ±0.14	1.90 ±0.20	0.15 ±0.05	BROWN 咖啡色	GREY 灰色	GREY 灰色			
			8.00 ±0.40	12.50 ±1.50									
24AWG 0.25mm ²			6.00 ±0.40	10.50 ±1.50	0.80 ±0.14	1.90 ±0.20	0.15 ±0.05	VIOLET 紫色	LIGHT BLUE 淺藍色	YELLOW 黃色			
			8.00 ±0.40	12.50 ±1.50									
22AWG 0.34mm ²			6.00 ±0.40	10.50 ±1.50	0.80 ±0.14	1.90 ±0.20	0.15 ±0.05	PINK 粉紅色	TURQUOISE 淺綠藍色	TURQUOISE 淺綠藍色			
			8.00 ±0.40	12.50 ±1.50									
			10.00 ±0.40	14.50 ±1.50									
20AWG 0.5mm ²			6.00 ±0.40	12.50 ±1.50	1.00 ^{+0.14} _{-0.00}	2.60 ±0.20	0.15 ±0.05	WHITE 白色	ORANGE 橘色	WHITE 白色			
			8.00 ±0.40	14.00 ±1.50									
			10.00 ±0.40	16.00 ±1.50									
			12.00 ±0.40	18.00 ±1.50									
18AWG 0.75mm ²			6.00 ±0.40	12.00 ±1.50	1.20 ^{+0.14} _{-0.00}	2.80 ±0.20	0.15 ±0.05	SKY BLUE 天藍色	WHITE 白色	GREY 灰色			
			☆ 6.00 ±0.40	12.00 ±1.50		3.00 ±0.20							
			8.00 ±0.40	14.00 ±1.50		2.80 ±0.20							
			☆ 8.00 ±0.40	14.00 ±1.50		3.00 ±0.20							
			10.00 ±0.40	16.00 ±1.50		2.80 ±0.20							
			☆ 10.00 ±0.40	16.00 ±1.50		3.00 ±0.20							
			12.00 ±0.60	18.00 ±1.50		2.80 ±0.20							
			☆ 12.00 ±0.60	18.00 ±1.50		3.00 ±0.20							
			18.00 ±0.60	24.00 ±1.50		2.80 ±0.20							
			☆ 18.00 ±0.60	24.00 ±1.50		3.00 ±0.20							

NOTE:


1. TEMPERATURE RANGE : -40 °C UP TO + 105 °C
2. MAXIMUM ELECTRICAL RATING: 600 VOLTS
3. TERMINAL MATERIAL : COPPER TUBE
4. PLATING : ELECTRO TIN PLATED
5. INSULATION MATERIAL : NYLON

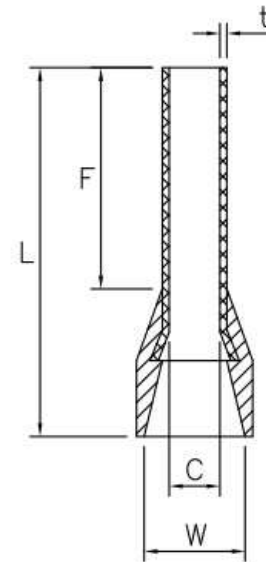

認可 APPROVALS

製圖 DRAFT:	TINA
設計 DESING:	KEN
核可 CHECKED:	KEN

第三視角
THIRD VIEW



MATERIAL

INSULATION: NYLON
MATERIAL: COPPER TUBE
TIN PLATING

單位 UNIT

m/m
比例 SCALE
1 : 1

日期 DATE : 2022. 04. 12