




EN:61010-1

NEW

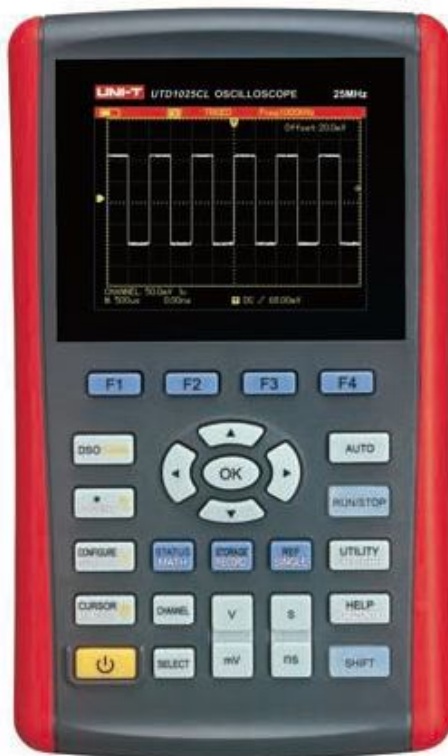

■ UTD1025CL

SPECIFICATIONS

Specifications	UTD1025CL	
Channel	1	
Bandwidth	25MHz	
Sample Rate	200MS/s	
Rise Time	14ns	
Memory Depth	12kpts	
Vertical Sensitivity	5mV/div~20V/div	
Time-Based Range	10ns/div~50s/div	
Storage	Bitmap, Setup, Waveform	
Trigger Modes	Edge, Pulse, Video, Slope	
Interface	Mini USB	
Multimeter Specifications	Range	Best Accuracy
DC Voltage (V)	400mV/ 4V/ 40V/400V	±(1%+5)
AC Voltage (V)	400mV/ 4V/ 40V/400V	±(1.2%+5)
DC Current (A)	400µA/ 4000µA	±(1.2%+5)
	40mA/ 4000mA	±(1%+5)
AC Current (A)	10A	±(1.5%+5)
	400µA/ 4000µA	±(2%+5)
Resistance (Ω)	40mA/ 4000mA	±(1.5%+5)
	10A	±(5%+5)
Capacitance (F)	400Ω/4KΩ/40KΩ/400K/4MΩ	±(1.2%+5)
	40MΩ	±(1.5%+5)
Display Count	51.20nF/512nF/5.120µF/51.20µF/100µF	±(3%+5)
	4000	

GENERAL CHARACTERISTICS

Power	100-240V 50/60Hz 1.5A
LCD Size	3.5 Inches 64K Color TFT LCD, (320×240)
Product Color	Red and Grey
Product Net Weight	0.9Kg
Product Size	199mm × 118mm × 49mm
Standard Accessories	DC Adaptor, Test Lead, Probe×1 (1×,10× switchable), 10A Current Divider, Power Cord, USB Cable,PC Software CD
Standard Quantity Per Carton	Gift Box, Carrying Bag, English Manual
Standard Individual Packing	10 PCs
Standard Carton Measurement	618mm × 464mm × 268mm (0.077 CBM Per Standard Carton)
Standard Carton Gross Weight	25Kg