

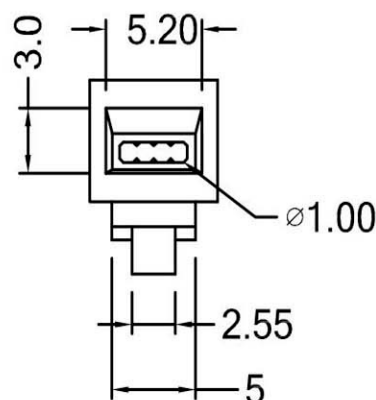





F: for flat cable



R: for round cable

1



2



0



1 : 2 prong for stranded wire

2 : 2 prong for stranded or solid wire

0 : 3 prong for stranded or solid wire



ID

blank: ID=1.00mm

MATERIAL & FINISH

Body: PC. UL94V-0, clear

Contact: Copper alloy with gold plated over nickel.

MECHANICAL SPECIFICATIONS

Temperature: -40°C to 85°C

Mating Cycles: 750 cycles min.

ELECTRICAL SPECIFICATIONS

Voltage: 125 VAC

Current: 1.5 A

Contact Resistance: 30 milliohms max.

Insulation Resistance: 500 megaohms min.

Dielectric Withstanding Voltage: 1000 VAC

CONTACT NO:


42:4P2C

44:4P4C



HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.
核准



TOLERANCE
容許公差

PART NAME 品名

DWG.
製圖

Helen

SCALE
比例

參考

SIZE.
尺寸

MM

MODULAR PLUG (4P2C OR 4P4C),(UL94-V0)
ROHS

DATE 制表日
2024/3/21

PAGE
張數

1 OF 1

REV.
版本

A

PART NO.

料號 C0050-4XXBNXX0R