



ROHS

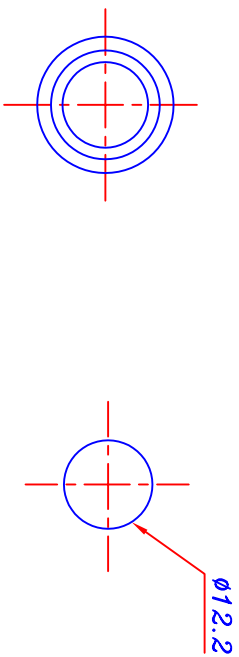

PANEL CUT-OUT

SPECIFICATION :

1. Circuit: 2P A: OFF-(ON)
B: ON-OFF
C: ON-(OFF)
2. Rating: 3A 125VAC/250VAC.
3. Contact Resistance: 50M OHMS MAX.
4. Insulation Resistance: DC 500V 100M OHMS.
5. Dielectric Strength: AC 1000V 1 minute
6. Withdrawal Force: 20N MIN.

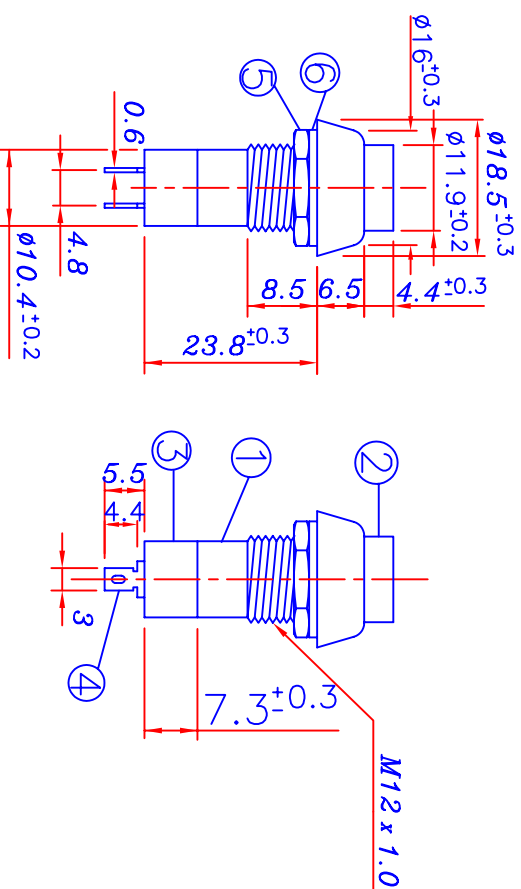

6507A : OFF-(ON)
6507B : ON-OFF
6507C : ON-(OFF)

6	SPRING WASHER	1	SPC			
5	NUT	1	SPC			
4	TERMINAL	2	BRASS			
3	BOTTON	1	BAKELITE			
2	KNOB	1	N66			
1	BODY	1	ABS			
NO.	DESCRIPTION	QTY	MATERIAL	SPECIFICATION	REMARK	
DRAW BY	周佩君	070407	SCALE	1 : 1	ITEM NO.	6507
DEGN BY					TITLE	PUSH BUTTON SWITCH
APPD BY			UNIT	MM		

DATE	DRAWNG BY	REVISED	△	同利企業有限公司	TELE LONG ENTERPRISE CO.,LTD	DRAWING NO.	6507-TN00-C
					FAX. 886-6-2530232		