


Electro-magnetic Transducer


Shape



Type(型号)	SMT1205XH10	SMT1209XH10	SMT1212XH10
Rated Voltage(额定电压)	5Vdc	9Vdc	12Vdc
Operating Voltage(电压范围)	4...7Vdc	7...11Vdc	8...15Vdc
a) Current(电流)	Max. 30mA		
a) Sound Output(输出声压)	min. 85dB at 10cm		
a) Resonant Frequency(谐振频率)	2300 ± 300Hz		
Operating Temperature(工作温度)	-40...+85 °C		
Storage Temperature(储存温度)	-40...+85 °C		
Weight(重量)	2g		

a) Value applying rated voltage.

Dimension

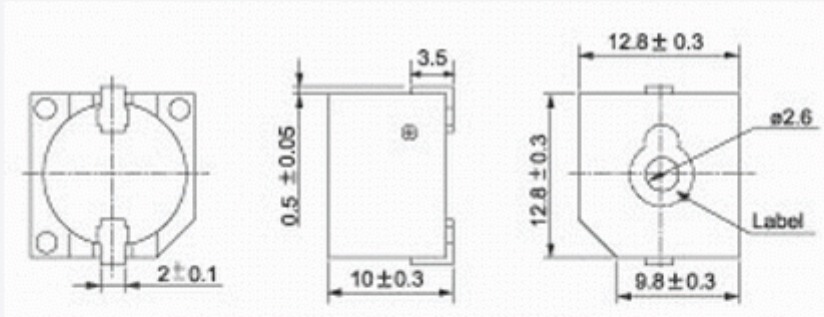

Characteristic

