


Features:

- 600V volts rating (R.M.S.)
- Thickness: 0.2mm

Specifications:

- Voltage rating: 600V AC, DC
- Current rating up to 9A(with #18 AWG)
- Dielectric withstanding Voltage: 1500V AC/minute
- Contact resistance: Initial value/10mΩ max.
After environmental testing/20mΩ max.
- Crimp resistance: 5mΩ max,
- Terminal retention force: 3.0Kg min.
- Ambient temperature range: -40°C ~ 105°C
(including temperature rise)

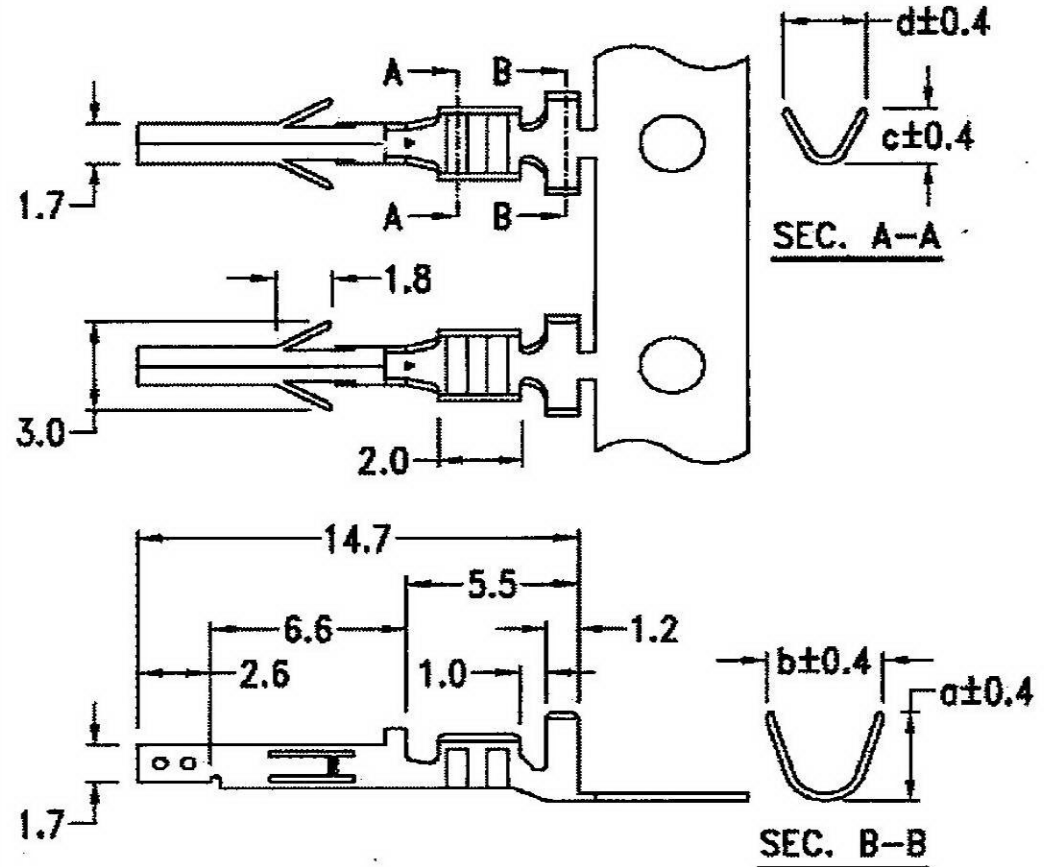

Ordering & Dimensional Information (mm) :

Dimension				Wire Size	Material	Finished
a	b	c	d	(AWG)		
2.3	2.3	1.65	1.8	#22 ~ #28	BRASS	Tin-plated
4.5	3.6	2.3	1.9	#18 ~ #24		
		2.8	2.4	#16		

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.
核准
DWG.
製圖
HELEN
DATE
制表日
2009/3/27

SCALE
比例
參考
UNIT
單位
MM
PAGE
張數
1 OF 1

TOLERANCE
容許公差
0 ± 0.40
.00 ± 0.25
ANG ±
SIZE
紙張尺寸
A4
REV.
版本
A
PART NAME 品名
4.2mm FEMALE TERMINAL BRASS MATERIAL
TIN PLATING 1ROLL=10K PCS
ROHS LOW-LEAD
PART NO.
料號 T5150-TBX00000R