




### Features:

- Available in 2 thru 24 circuits
- Material: UL 94V-0 nylon
- Standard color: Black
- Recommended panel thickness: 1.57mm

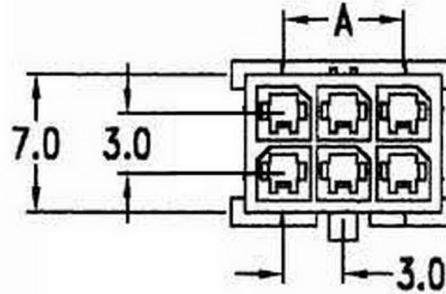



ITEM: H4030-  
XXPDB000R  
Feature  
With mounting ears

### Specifications:

- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Amps	5 A	5 A	4 A	3 A	2 A	1 A

- Voltage rating: 250V AC(RMS) or DC
- Insulation resistance: 1000mΩ Min.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C max.  
(carry rated current load)

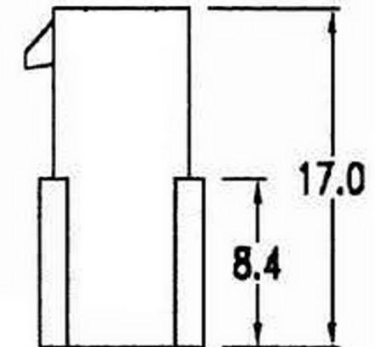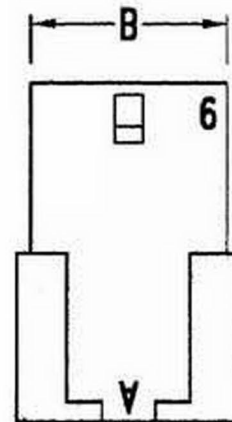

WITHOUT EAR  
ITEM: H4030-XXPDB001R

### Dimensional Information

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		4.0	14	18.0	22.0
4	3.0	7.0	16	21.0	25.0
6	6.0	10.0	18	24.0	28.0
8	9.0	13.0	20	27.0	31.0
10	12.0	16.0	22	30.0	34.0
12	15.0	19.0	24	33.0	37.0

RoHS Compliant	<b>HSM</b> 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 Betty	 UNLESS OTHERWISE SPECIFIED TOLERANCE .000 ± 0.05 ( mm ) .00 ± 0.15 ( mm ) .0 ± 0.25 ( mm )	PART NAME 品名 MICRO-FIT 3.0 FEMALE HOUSING DUAL ROW 2XXXP BLACK INSULATOR ROHS
DWG. 製圖 Yumi		SCALE 比例 參考 UNIT 單位 M M PAGE 張數 1 OF 1
DATE 製表日 2008/01/23	REV. 版次 A	