


VCOM USB 2.0 CABLE 80°C 30V (A group of White lettering)

REV	DESCRIPTION	DATE
A/0	Initial issue	2017-04-27

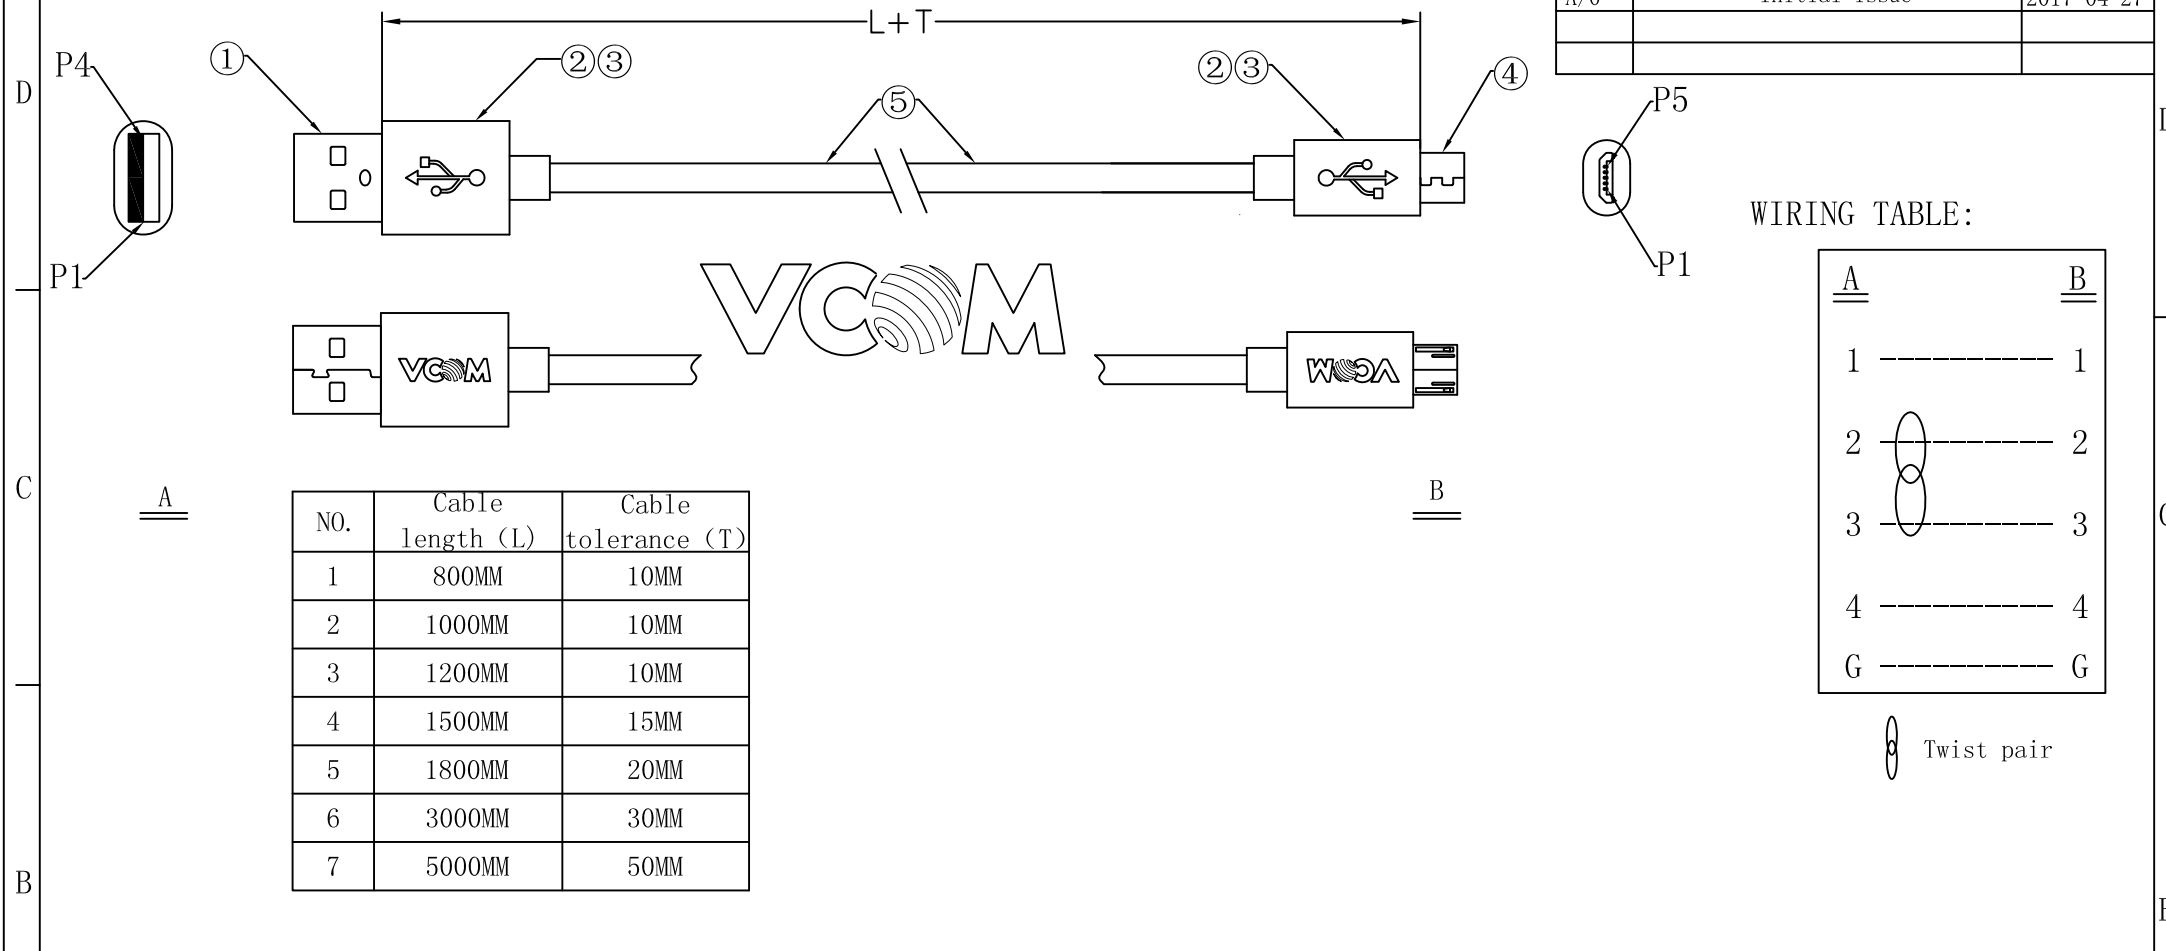

NO.	Cable length (L)	Cable tolerance (T)
1	800MM	10MM
2	1000MM	10MM
3	1200MM	10MM
4	1500MM	15MM
5	1800MM	20MM
6	3000MM	30MM
7	5000MM	50MM


WIRING TABLE:


<u>A</u>	<u>B</u>
1	1
2	2
3	3
4	4
G	G

 Twist pair

Test Conditions:

1. 100% open & short circuit test;
2. Insulation Resistance: 2.0Mohm (MIN) ;
3. Conduction Resistance: 5.0ohm (MAX) at 300V DC/0.01S .

A	⑤	CABLE: [28AWG*1P+26AWG*2C+AL/MY+DW+BD] PVC JACKET, BLACK, VCOM LETTERING	mm			 <b>VCOM INTERNATIONAL LTD.</b>
	④	PLUG:USB Micro A MALE SOLDERING TYPE, NICKEL-PLATED PBT BLACK COLOR	PCS			
	③	INNER MOLDING:LD PE	g			
	②	OVER MOLDING:PVC-50P BLACK PVC	g			
	①	PLUG:USB A MALE SOLDERING TYPE, NICKEL-PLATED PBT WHITE COLOR	SET			
	NO.	MATERIAL DESCRIPTION	MATERIAL NUMBER	UNIT	QTY	MOLD NUMBER

ITEM	USBAM/Micro USB5PM 2.0V	CUSTOMER		UNIT	mm	PAGE: 1 of 1
PART NO.	VC-F02-0078	CUSTOMER NO.		SCALE		
PRODUCT NO.	CU271	REV	A/0			2017-04-27
APPROVED BY:		CHECKED BY:		DRAWN BY:CT		