

SPECIFICATION

Current Rate:3 AMP
 Insulation Resistance:5000M Ω Min.
 Contact Resistance:10m Ω Max.
 Dielectric voltage:100V AC for one minute
 Operation Temperature:-40 °C to +105 °C

MATERIAL

Insulator:Polyester, UL 94V-0◎Standard:Nylon-6T
 Contact Pin:Brass
 Tin, Gold plated◎Standard:Gold flash all over

ORDER INFORMATION

P H 1 R U 2 5 - 2





X X

X


X

B

A/B/C

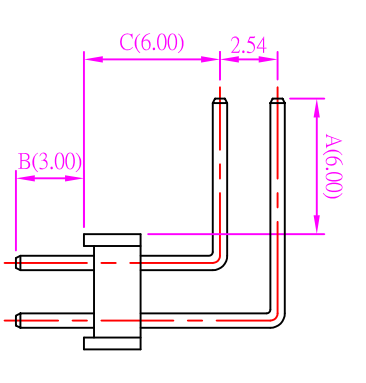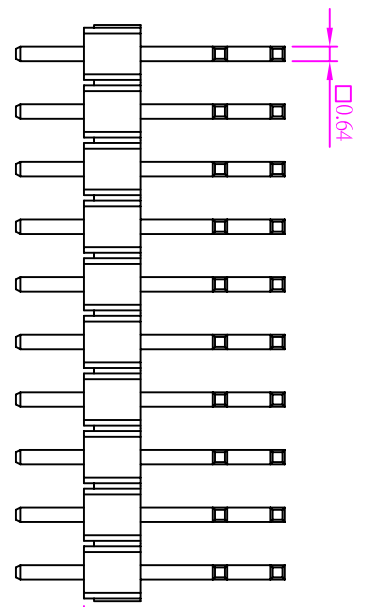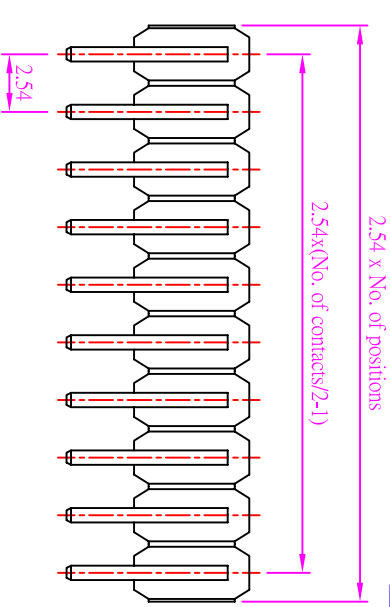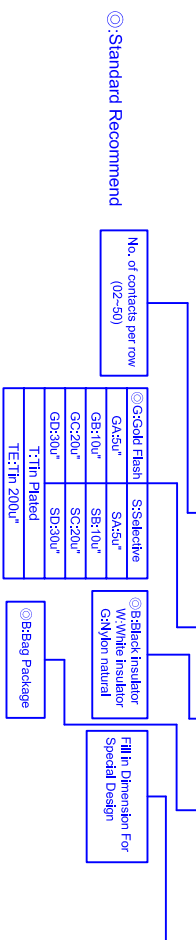

Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

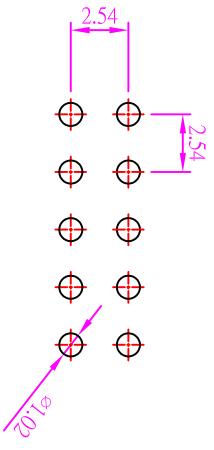

AREA	REV.	DESCRIPTION	DATE

<p>Amitek Technology Co., Ltd. TEL:886-2-2268-8036 FAX:886-2-2268-8035</p>		<p>品名 TITLE PIN HEADER 2.54mm RIGHT ANGLE TYPE</p> <p>品號 PART NO. PH1RU25-2XX</p> <p>圖號 DRAWING NO. PH1RU25-2XX</p> <p>客戶品號 CUSTOMER P/N</p> <p>公差 TOLERANCE .X ±0.35 .XX ±0.25</p>		<p>版本 REV. A</p> <p>比例 SCALE 3:1</p> <p>單位 UNIT mm</p>		<p>日期 DATE 09/22/2004</p> <p>繪圖 DRAWN Kent</p> <p>核對 CHECKED Paul</p> <p>核准 APPROVED James</p>	
--	--	---	--	--	--	--	--