


PIN	Dim. A	Dim. B
6	5.08	12.98
8	7.62	15.52
10	10.16	18.06
12	12.7	20.60
14	15.24	23.14
16	17.78	25.68
18	20.32	28.22
20	22.86	30.76
24	27.94	35.84
26	30.48	38.38
30	35.56	43.46
34	40.64	48.54
40	48.26	56.16
50	60.96	68.86
60	73.66	81.56

带@符号为重点尺寸,

Recommend p.c. Board Layout

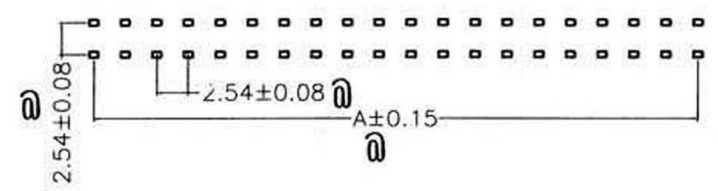

**MATERIAL&FINISH**  
 Insulator: PBT Glass Fiber(UL94V-0)  
 Contact : Brass  
 Contact : Gold-Plated Over Nickel.

**SPECIFICATIONS**  
 Current Rating : 1A AC,DC  
 Voltage Rating : 250V AC,DC  
 Temperature Range: -40°C To+105°C  
 Contact Resistance: 20mΩ Min  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 500V AC/Min

<p>RoHS Compliant</p>		<p><b>HSM</b> 玄茂科技股份有限公司  <b>HSUAN MAO TECHNOLOGY CO., LTD.</b></p>	
<p>APPD. 核准 Angel</p>		<p>UNLESS OTHERWISE SPECIFIED          TOLERANCE :          X ±0.2 ANGLES : ±2°          XX ±0.1          XXX ±0.05 DO NOT SCALE DRAWING</p>	<p>PART NAME 品名          DIP PLUG 2.54mm X 2.54mm XXP          BLACK INSULATOR ROHS</p>
<p>DWG. 製圖 Yumi</p>	<p>SCALE 比例 參考</p>	<p>UNIT 單位 M M</p>	<p>PART NO.          料號 C3100-XXABXB00R</p>
<p>DATE 製表日          2009/07/09</p>	<p>PAGE 張數 1 OF 1</p>	<p>SIZE. 紙張尺寸 A 4</p>	<p>REV. 版次 A</p>