



Specifications
 Current Rating: 3A AC, DC
 Voltage Rating: 250V AC Maximum
 Operating Temp: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding voltage: 1000V AC/minute
 Terminal Material: Brass/Tin-plated
 Material: Nylon 66, UL94V-0

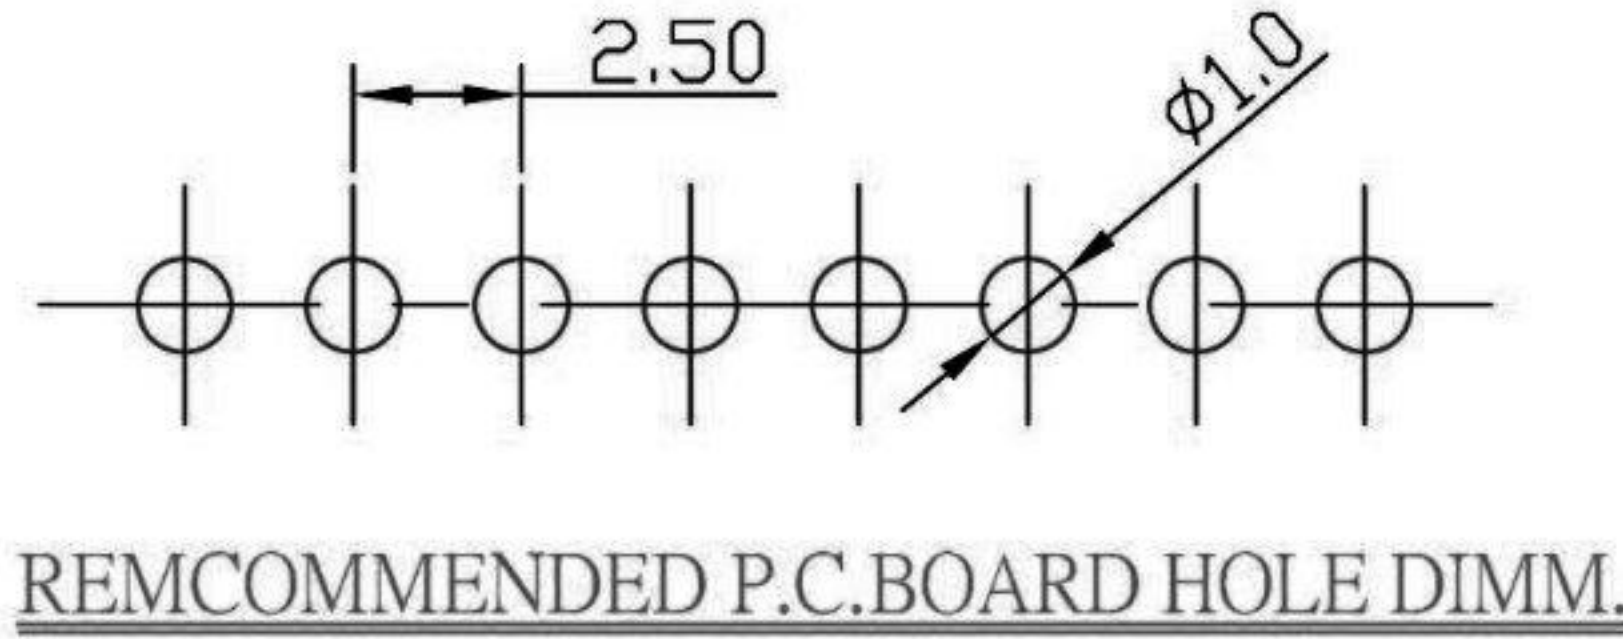

RECOMMENDED P.C. BOARD HOLE DIMM.

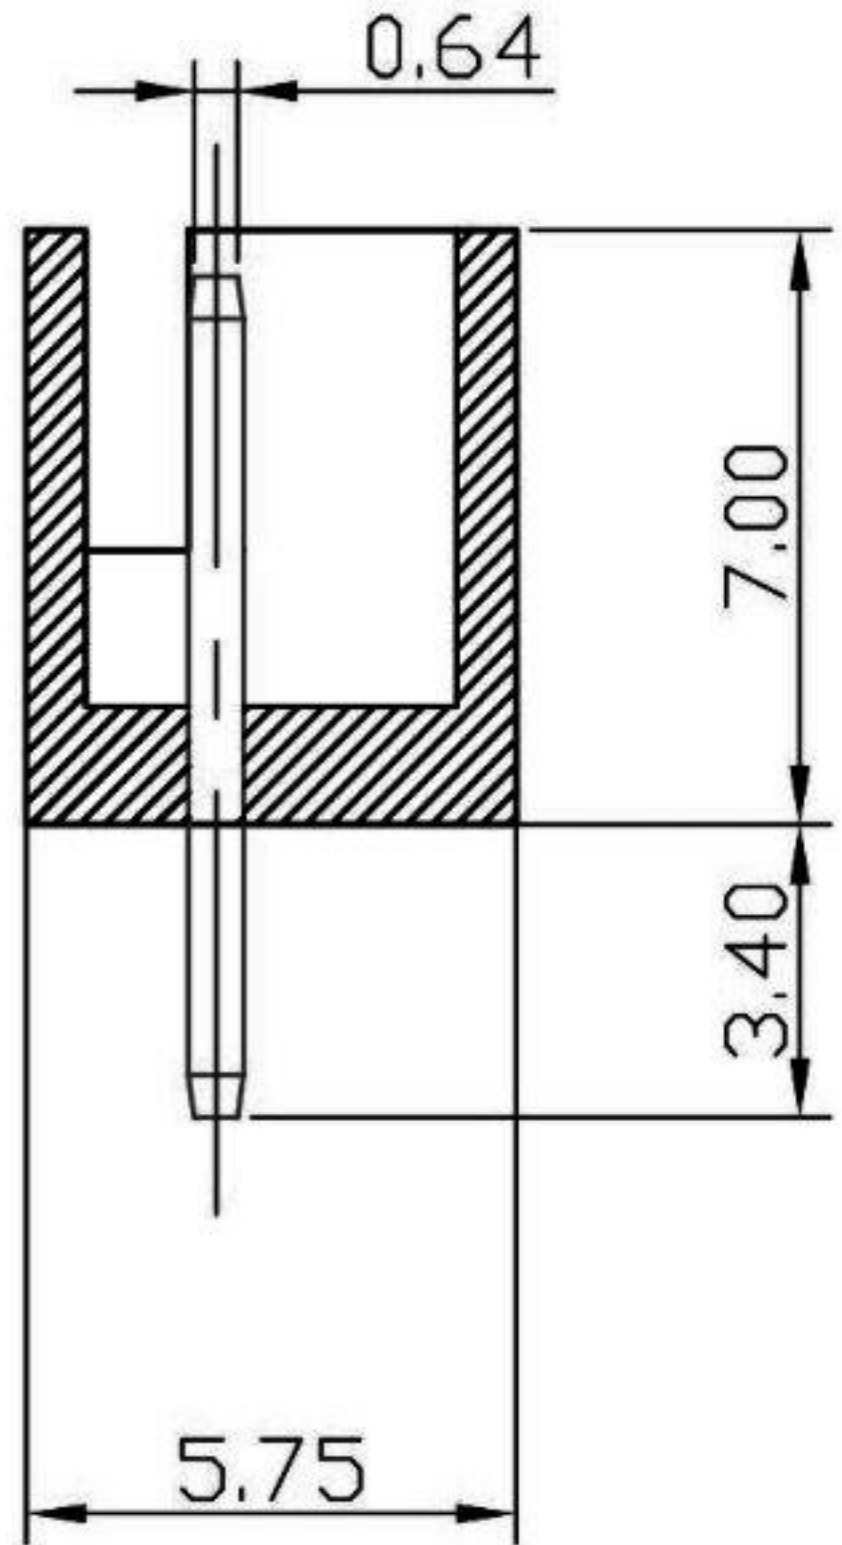

Poles	Dimension mm (in.)	
	A	B
2	2.50 (0.098)	7.50 (0.295)
3	5.00 (0.197)	10.00 (0.394)
4	7.50 (0.295)	12.50 (0.492)
5	10.00 (0.394)	15.00 (0.591)
6	12.50 (0.492)	17.50 (0.689)
7	15.00 (0.591)	20.00 (0.787)
8	17.50 (0.689)	22.50 (0.886)
9	20.00 (0.787)	25.00 (0.984)
10	22.50 (0.886)	27.50 (1.082)
11	25.00 (0.984)	30.00 (1.181)
12	27.50 (1.082)	32.50 (1.280)
13	30.00 (1.181)	35.00 (1.378)
14	32.50 (1.280)	37.50 (1.476)
15	35.00 (1.378)	40.00 (1.575)
16	37.50 (1.476)	42.50 (1.673)

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准 DWG. 製圖 HELEN DATE 制表日 2012/12/20	SCALE 比例 參考 UNIT 單位 MM PAGE 張數 1 OF 1	TOLERANCE 容許公差 .0 ±0.25 .00 ±0.35 ANG. ± SIZE 紙張尺寸 A4 REV. 版本 A	PART NAME 品名 2.5mm WAFER 1X??P STRAIGHT TYPE TIN PLATING WHITE COLOR WITHOUT KINK ROHS PART NO. 料號 W7600-XXPSNTW0R