

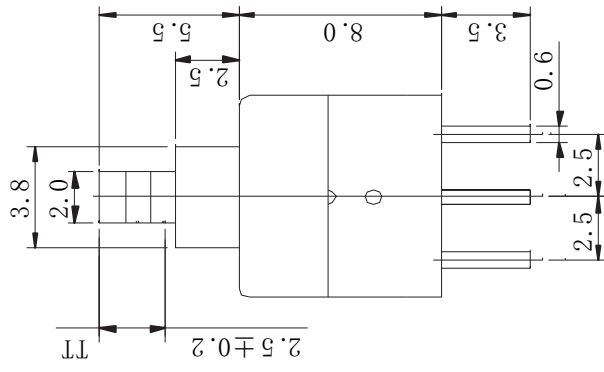
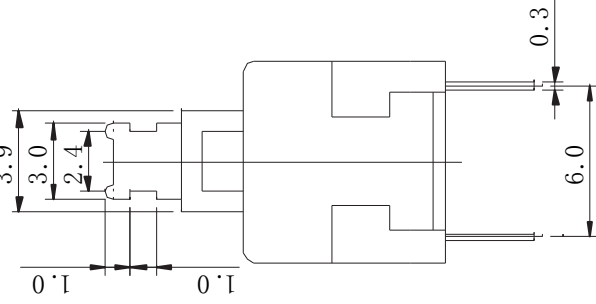





SCHEMATIC



Rated Voltage	DC30V 0.1A
Withstand Voltage	AC250V 1 minute
Contact Resistance	≤ 50 mΩ
Operating Force	160 ± 80gf
Insulation Resistance	≥ 100 MΩ DC250V
Soldering Process	Hand Soldering
Mechanical Life	100,000 cycles
Electrical Life	10,000 cycles
Soldering Temper	Hand soldering Wave soldering
Total Travel (TT)	2.5 ± 0.2 mm
Operating Temper	-25 °C ~ +65 °C
Ambient Humidity Used	< 85%RH

REVISION	DESCRIPTION	REVISED BY	TOLERANCES .x± .xx±	ANGLE 1/2°	SCALE	UNIT	PART NAME	BS800 SPEC DRAWING	DWG NO
△A					蔡劍	mm			
△A					DESIGNED BY				
△A					APPROVED BY				
△A	2010.06.21 換新圖框, 重新出圖	吳美玉	Alice			2010.06.21	PART NO	BS800N	WS1314A