


Specifications

Current Rating: 3A AC, DC  
 Voltage Rating: 250V AC Maximum  
 Operating Temp: -25°C ~ +85°C  
 Contact Resistance: 10mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Terminal Material: Brass/Tin-plated  
 Material: Nylon 66, UL94V-0

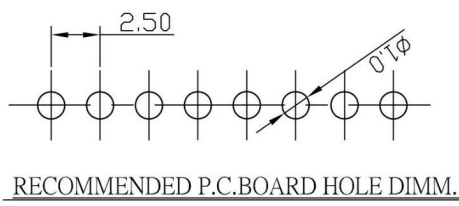

Poles	Dimension mm (in.)	
	A	B
2	2.50 (0.098)	7.50 (0.295)
3	5.00 (0.197)	10.00 (0.394)
4	7.50 (0.295)	12.50 (0.492)
5	10.00 (0.394)	15.00 (0.591)
6	12.50 (0.492)	17.50 (0.689)
7	15.00 (0.591)	20.00 (0.787)
8	17.50 (0.689)	22.50 (0.886)
9	20.00 (0.787)	25.00 (0.984)
10	22.50 (0.886)	27.50 (1.082)
11	25.00 (0.984)	30.00 (1.181)
12	27.50 (1.082)	32.50 (1.280)
13	30.00 (1.181)	35.00 (1.378)
14	32.50 (1.280)	37.50 (1.476)
15	35.00 (1.378)	40.00 (1.575)
16	37.50 (1.476)	42.50 (1.673)

RoHS Compliant		<b>玄茂科技股份有限公司</b> <b>HSUAN MAO TECHNOLOGY CO., LTD.</b>	
APPD. 核准	BETTY	TOLERANCE 容許公差 X.XX ± 0.25 X.X ± 0.35	PART NAME 品名 2.5mm WAFER XXP RIGHT ANGLE TIN PLATING WHITE COLOR WITHOUT KINK ROHS
DWG. 製圖	BETTY		
DATE 制表日	2009/12/08	UNIT 單位 M M	PART NO. 料號 W7600-XXPRNTW0R
		PAGE 張數 1 OF 1	
		REV. 版次 A	