




MATERIAL

Insulator : 30% Glass fiber PBT
 Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP
 Insulation Resistance : 5000MΩMin. at DC 500V
 Contact Resistance : 20mΩMax. at DC 100mA
 Dielectric Voltage : AC 500V for one minute
 Operation Temperature : -40°C to + 105°C

POLES	DIM A	DIM B	DIM C
6	15.20	12.80	5.08
8	17.78	15.48	7.62
10	20.30	18.10	10.16
12	22.84	20.64	12.70
14	25.38	23.18	15.24
16	27.92	25.72	17.78
20	33.00	30.80	22.86
24	38.08	35.88	27.94
26	40.62	38.42	30.48
30	45.70	43.50	35.56
34	50.80	48.58	40.64
40	58.40	56.20	48.26
44	63.48	61.28	53.34
50	71.10	68.90	60.96
56	78.72	76.52	68.58
60	83.80	81.60	73.66
64	88.88	86.68	78.74

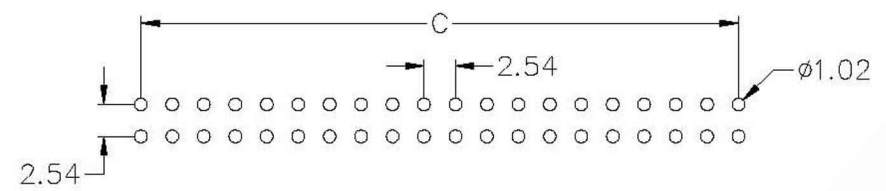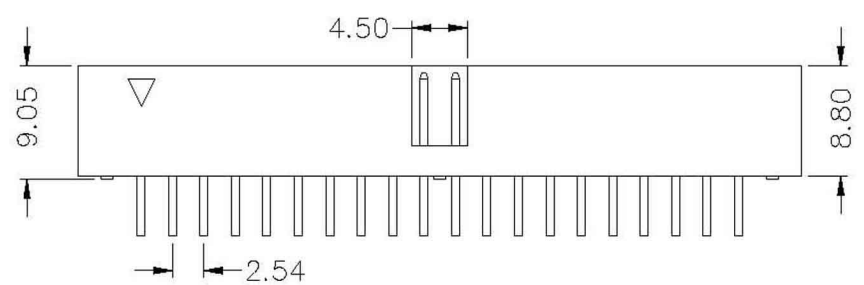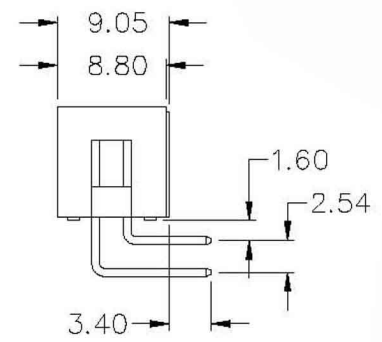

Recommended P.C.B. Layout

APPD. 核准	BETTY	SCALE 比例 参考	TOLERANCE .0 =±.30 .00 =±.20 .000 =±.XXX .0000=±. ANG.=±3°	PART NAME 品名 BOX HEADER 2.54mm X 2.54mm XXP RIGHT ANGLE TYPE GOLD FLASH PLATING BLACK INSULATOR PBT MATERIAL ROHS			
	DWG. 製圖				BETTY	UNIT 單位	M M
DATE 制表日	2009/02/26	PAGE 張數	1 OF 1	REV. 版次	A	PART NO. 料號	C3510-XXRPG B00R

RoHS Compliant **HSM** 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.