
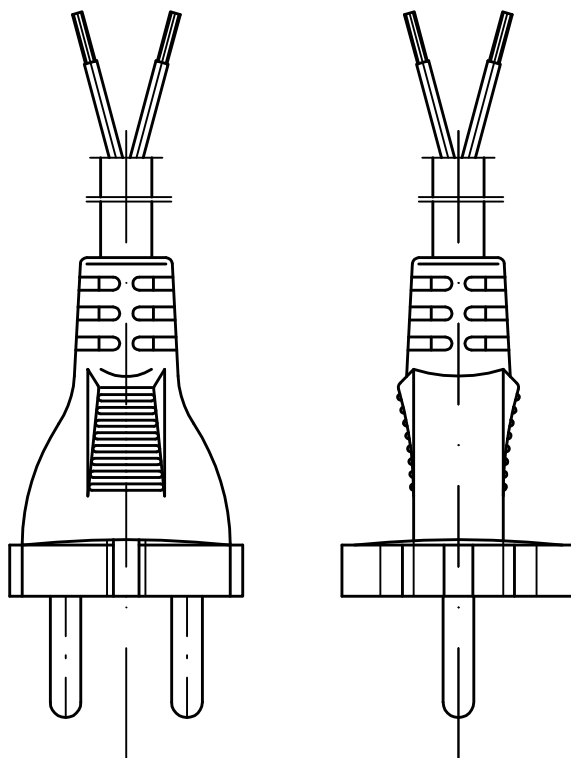


# CATALOG CARD

plug with cord: WJ-20R H05RR-F



*Plug non-rewirable, moulded*

**Technical data:**

Rated current: 16A - cable 3G0,75 ÷ 3 G2,5mm<sup>2</sup> ( 3G1 mm<sup>2</sup> - up to 2m )  
Rated voltage: 250V~  
Length: L= up to 10 m  
Degree of protection : IP20

**Elements:**

- cable: H05RR-F 3G0,75 ÷ 3G2,5  
Rated voltage 300/500V,  
Insulation: rubber EPR  
Coating: rubber EPR  
Temperature limits:  
- maximum conductor temperature +60°C  
- minimum temperature conditions -25°C

- plug WJ-20, non-rewirable, IP20, 16A, 250V~