




Yueqing Omtter Electronic & Technology Co., Ltd.

SCA-043

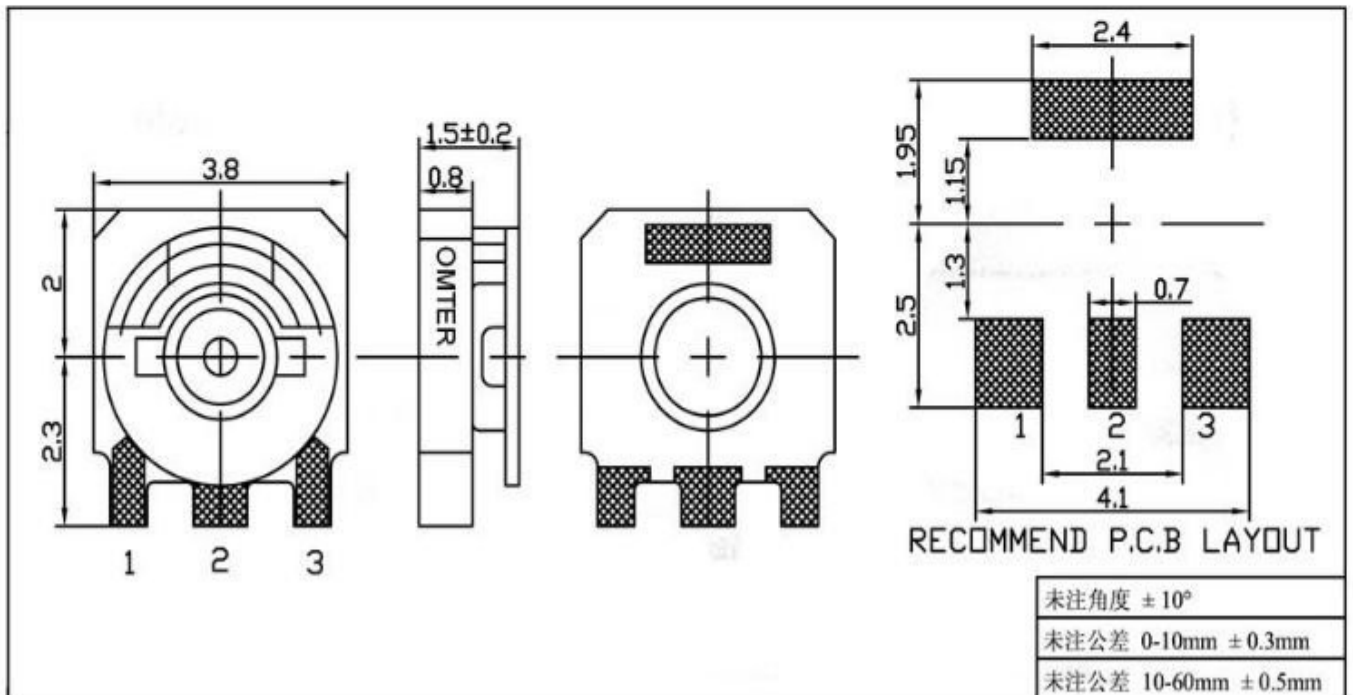

Feature特点:

- ◇ 3 Contact Points (三点接触)
- ◇ RoHS Compliant (环保产品, 有RoHS认证)

trimmer

参数特性 *General Specification* :

总阻值范围 Nominal Resistance	200 Ω to 1M Ω
标准阻值误差 Resistance Tolerance	$\pm 30\%$ standard
残留阻值 Residual Resistance	Maximum 5% of Nominal Resistance
线性 Taper	Linear (B)
额定功率 Power Rating	0.1W (70 $^{\circ}$ C)
使用电压 Operating Voltage	Less than (少于) 50V
旋转寿命 Rotational Life	10 Cycles
温度系数 Temperature Coefficient	± 250 ppm/ $^{\circ}$ C
旋转角度 Rotational Angle	260 $^{\circ}$ \pm 10 $^{\circ}$
扭转力矩 Torque	20 ~ 200 g.cm
使用温度 Operating Temperature	-25 $^{\circ}$ C ~ +85 $^{\circ}$ C
耐温性能 Heat Characteristics	Remain in specifications after 240 hours at 80 \pm 3 $^{\circ}$ C and 1.5 hours at room temperature
耐湿性能 Damp-Heat Characteristics	Remain in spec. after 240 hours at 40 \pm 2 $^{\circ}$ C, RH 90 ~ 95% and 1.5% at room temperature and humidity
焊锡方式 Soldering Method	Hand Soldering
焊锡温度 Soldering Temperature	260 $^{\circ}$ C
焊锡时间 Soldering Time	2 seconds

地址: 浙江省乐清市乐成镇后所工业区 **ADD:** Housuo Industrial Zone, Yuecheng Town, Yueqing City, Zhejiang, China
电话 **Tel:** +86-577-27811881 传真 **Fax:** +86-577-62591280 **Email:** Omter@omter.com **Website:** www.omter-tyxn.com